

4

3







2

1

# TERMINAL

# WIRING DIAGRAM

TRT-157-7P (M3.5)

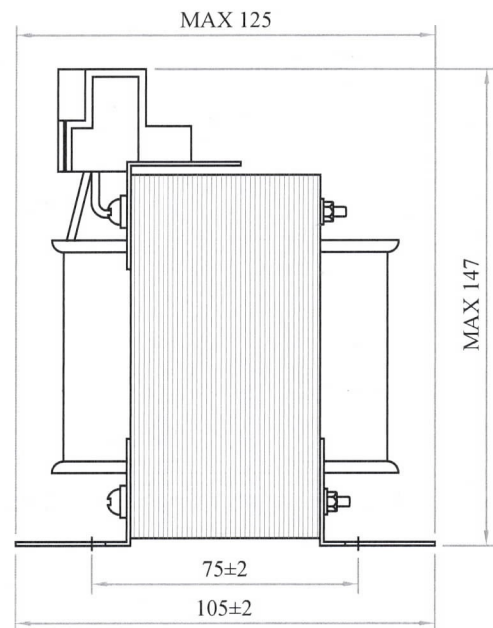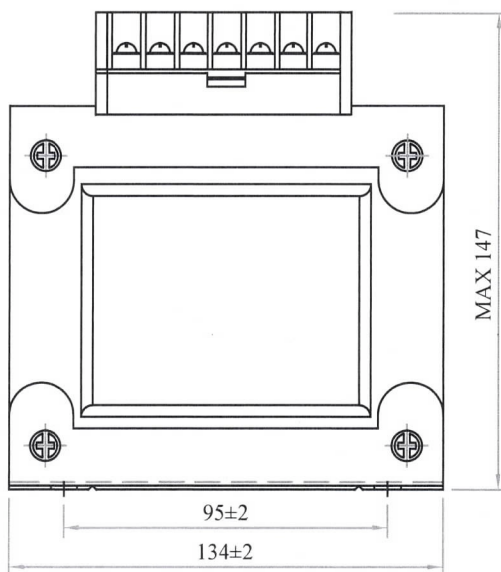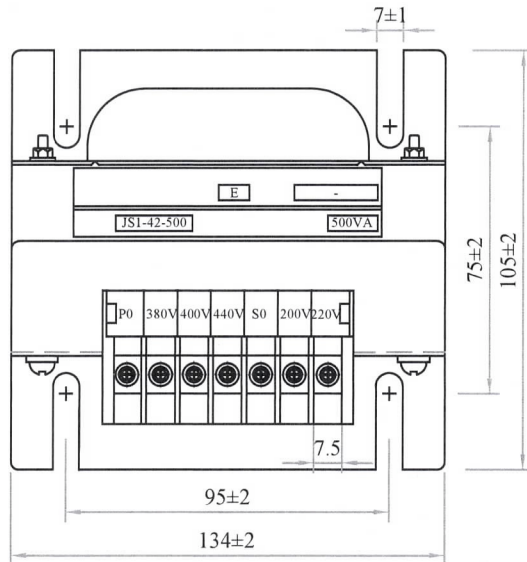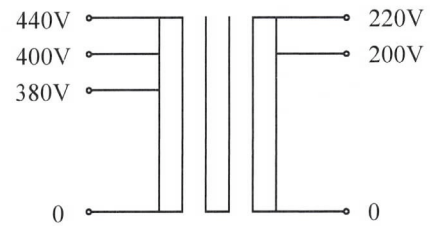

|                   |              |
|-------------------|--------------|
| PHASE / CAPACITY  | 1PH 500VA    |
| FREQUENCY         | 50/60Hz      |
| PRIMARY VOLTAGE   | 380-400-440V |
| SECONDARY VOLTAGE | 200-220V     |
| SECONDARY CURRENT | 2.5A(200V)   |
| INSULATION        | " E "        |
| WEIGHT            | 7.5 Kg.      |

General Tolerance  
0-200 ± 2 More Than 201 ± 3

| CHEKED   | DESIGN                          | DRAWN | SCALE | APPROVAL |
|----------|---------------------------------|-------|-------|----------|
|          |                                 |       |       |          |
| ITEM.    | 1PH 500VA ISOLATION TRANSFORMER |       |       |          |
| ITEM No. | -                               |       |       |          |
| DRA. No. | JS1-42-500VA                    |       |       |          |
| CLIENT   | -                               |       |       |          |
| DRAWN    | SDS ASIA CO., LTD.              |       |       |          |

| SYM | REVISION RECORD | DATE | DRAWN |
|-----|-----------------|------|-------|
|-----|-----------------|------|-------|

4

3



2

1