

4

3







2

1

TERMINAL

WIRING DIAGRAM

TRT-157-7P (M3.5)

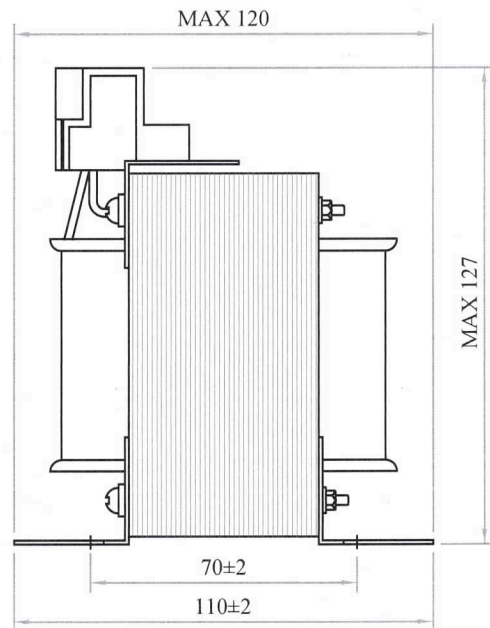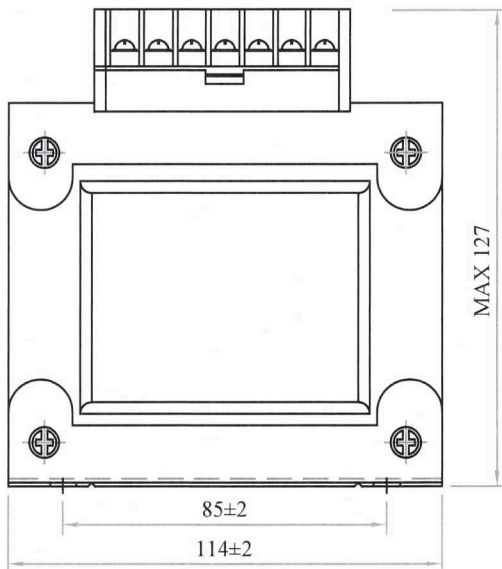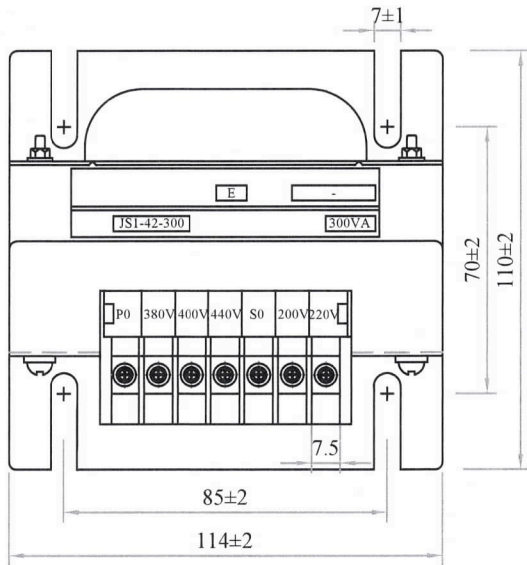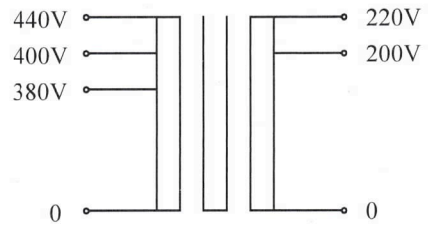

PHASE / CAPACITY	1PH 300VA
FREQUENCY	50/60Hz
PRIMARY VOLTAGE	380-400-440V
SECONDARY VOLTAGE	200-220V
SECONDARY CURRENT	1.5A(200V)
INSULATION	" E "
WEIGHT	4.5 Kg.

General Tolerance
0-200 ± 2 More Than 201 ± 3

CHEKED	DESIGN	DRAWN	SCALE	APPROVAL
ITEM.	1PH 300VA ISOLATION TRANSFORMER			
ITEM No.	-			
DRA. No.	JS1-42-300VA			
CLIENT	-			
DRAWN	SDS ASIA CO., LTD.			

SYM REVISION RECORD DATE DRAWN

4

3



2

1

D

D

C

C

B

B

A

A