

4

3







2

1

TERMINAL

TRT-157-7P (M3.5)

WIRING DIAGRAM

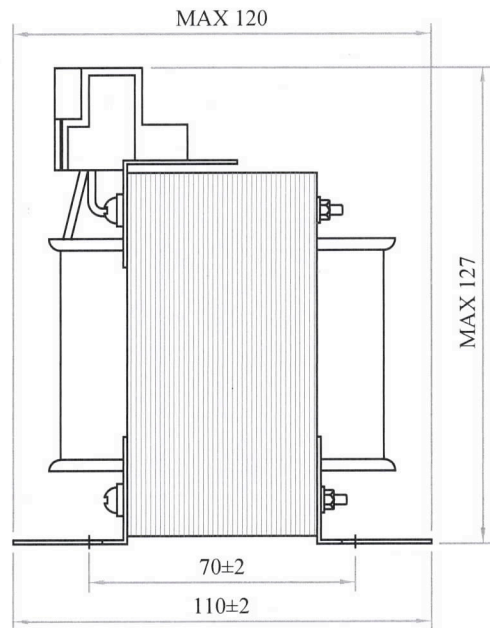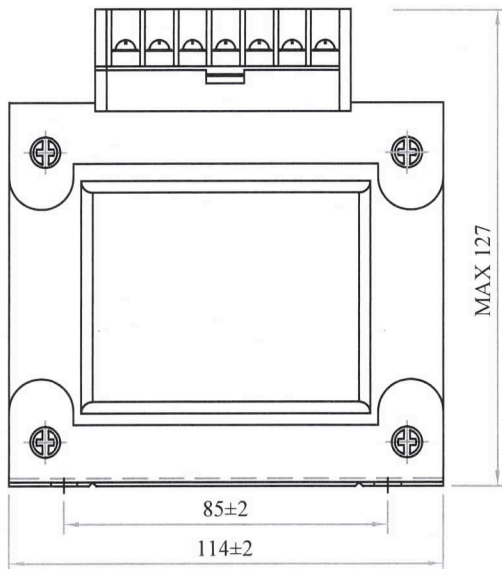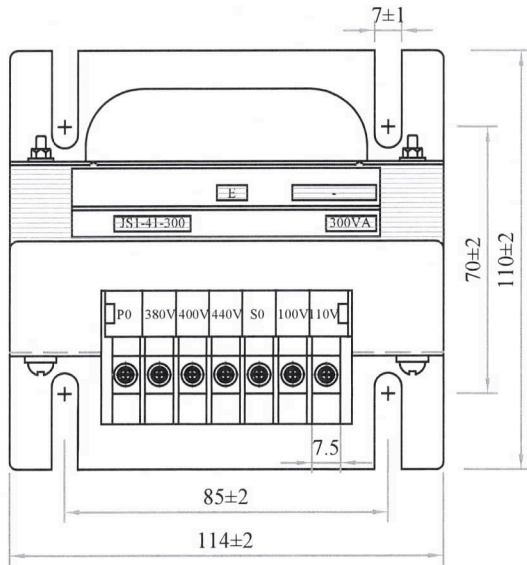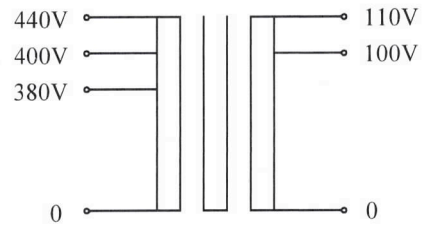

PHASE / CAPACITY	1PH 300VA
FREQUENCY	50/60Hz
PRIMARY VOLTAGE	380-400-440V
SECONDARY VOLTAGE	100-110V
SECONDARY CURRENT	3.0A(100V)
INSULATION	" E "
WEIGHT	4.5 Kg.

General Tolerance
0-200 ± 2 More Than 201 ± 3

CHEKED	DESIGN	DRAWN	SCALE	APPROVAL

ITEM. 1PH 300VA ISOLATION TRANSFORMER

ITEM No. -

DRA. No. JS1-41-300VA

CLIENT -

DRAWN SDS ASIA CO., LTD.

SYM	REVISION RECORD	DATE	DRAWN
4			
3			

4

3



2

1

D

D

C

C

B

B

B

B

A

A