

4

3







2

1

TERMINAL

WIRING DIAGRAM

TRT-157-7P (M3.5)

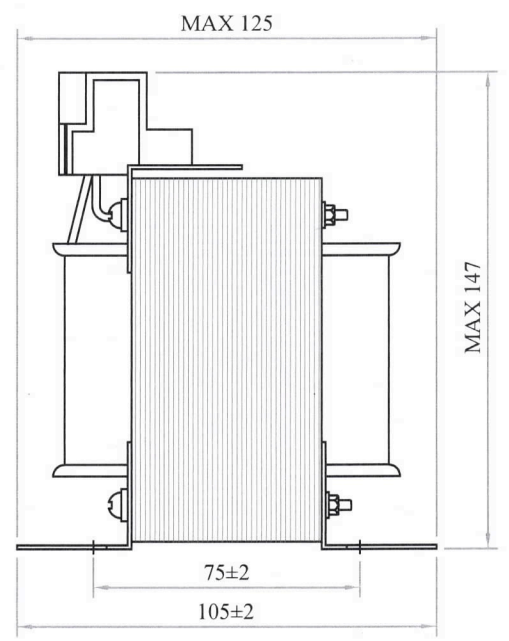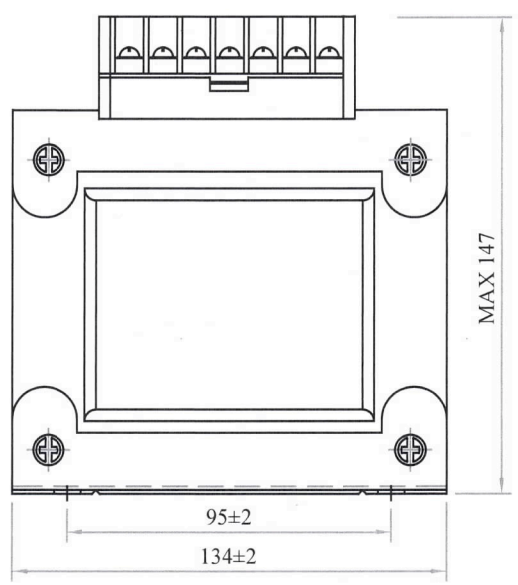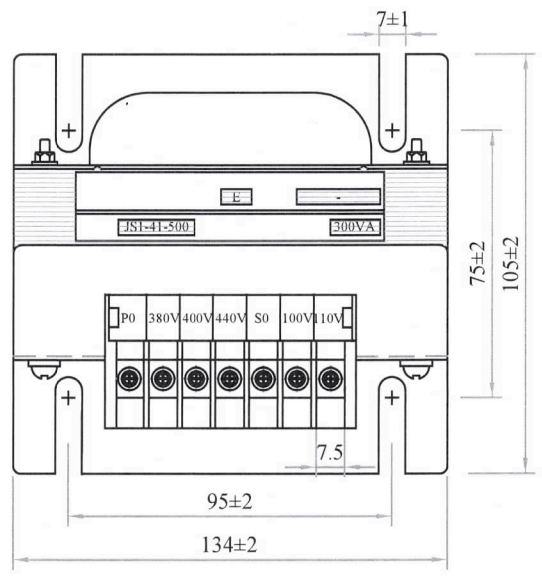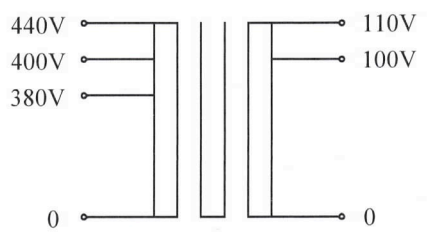

PHASE / CAPACITY	1PH 500VA
FREQUENCY	50/60Hz
PRIMARY VOLTAGE	380-400-440V
SECONDARY VOLTAGE	100-110V
SECONDARY CURRENT	5.0A(100V)
INSULATION	" E "
WEIGHT	7.5 Kg.

General Tolerance
0-200 ± 2 More Than 201 ± 3

CHEKED	DESIGN	DRAWN	SCALE	APPROVAL

ITEM.	1PH 500VA ISOLATION TRANSFORMER
ITEM No.	-
DRA. No.	JS1-41-500VA
CLIENT	-
DRAWN	SDS ASIA CO., LTD.

SYM	REVISION RECORD	DATE	DRAWN

4

3



2

1

D

D

C

C

B

B

A

A